

Cleaning System

NK.LP120

PERISTALTIC PUMPS



Main characteristics

- Variable speed 10 ÷ 100%
- Suitable for viscous liquids
- Long life of the tube
- Wall mounting with fast-coupling bracket
- fire resistant IP65 Enclosure and antacid
- On / off completely protected
- Can be customized on request
- Analog Detergent
- specific pump for dishwashers with single solenoid
- Santoprene tube replaced without tools



ISO 9001
ISO 14001
SA 8000
BUREAU VERITAS
Certification



Distributor / Kontakt: Lumipra GmbH

Speditionstraße 15A · 40221 Düsseldorf · +49 211 93079616


info@lumipra.com · <https://lumipra.com/>

Cleaning System

NK.LP120- Performance data

Nk.LP 120						
FLOW RATES	PRESSURES	POWER SUPPLY	REVOLUTION DISPLAC.	FITTINGS	DIMENSIONS	WEIGHT
Variable 0,54÷7,2 l/h	1 bar	100÷240 Vac 24 Vac	2,5 ml	Ø 4x6 mm	112x90x90 mm	0,6 Kg


Installation kit

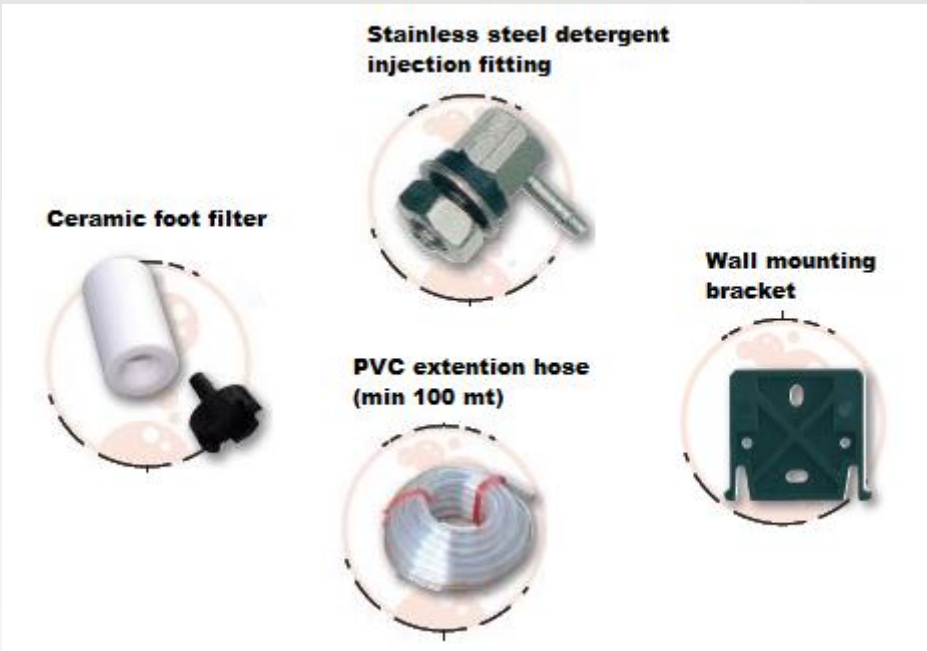

Distributor / Kontakt: Lumipra GmbH
Speditionstraße 15A · 40221 Düsseldorf · +49 211 93079616
info@lumipra.com · <https://lumipra.com/>

Cleaning System

Optional

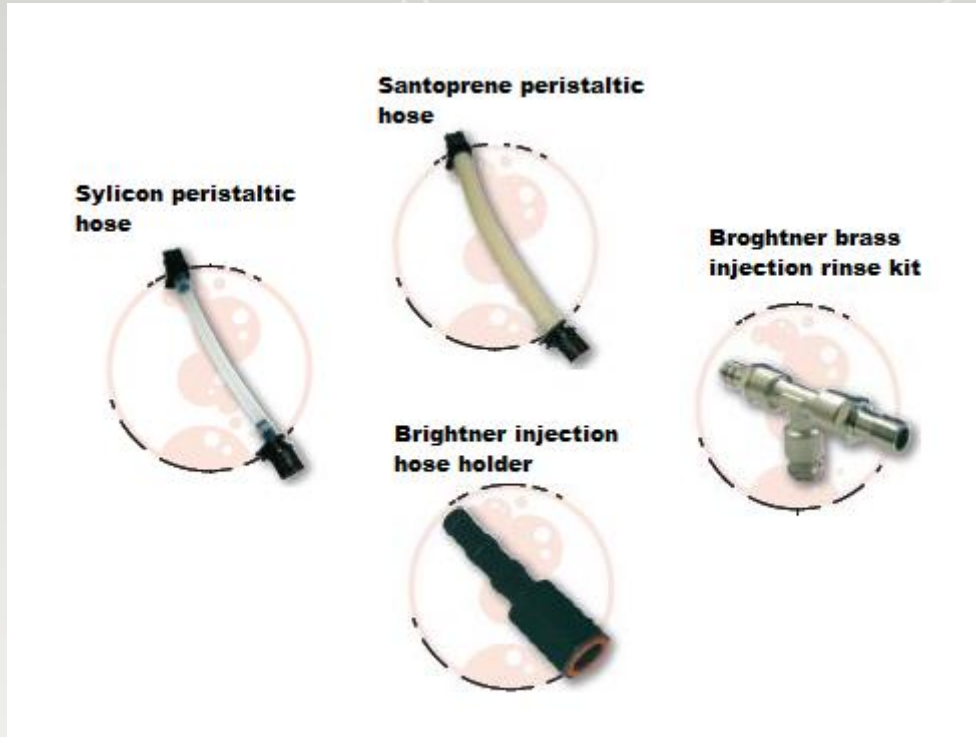

Distributor / Kontakt: Lumipra GmbH

Speditionstraße 15A · 40221 Düsseldorf · +49 211 93079616

info@lumipra.com · <https://lumipra.com/>

ISO 9001
ISO 14001
SA 8000
BUREAU VERITAS
Certification

